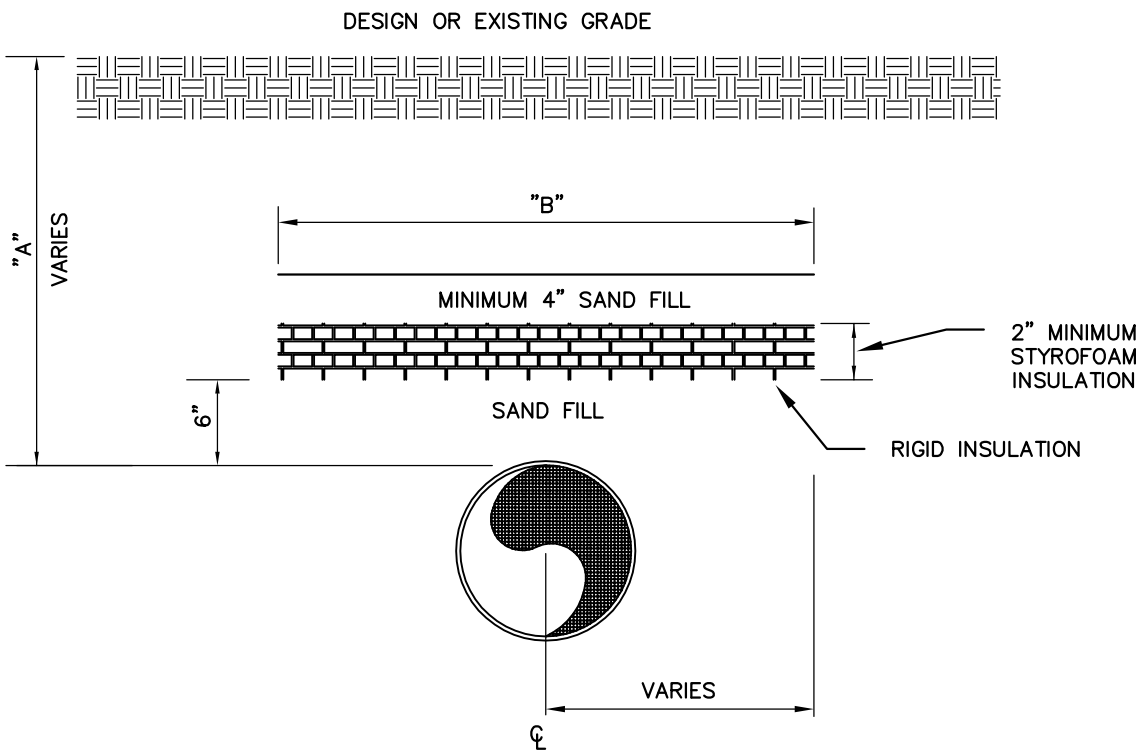

NOTES:

PIPE SHALL BE CENTERED UNDER INSULATION UNLESS OTHERWISE SPECIFIED

COVER OVER PIPE – "A"	WIDTH OF INSULATION BOARD – "B"
2'	12'
3'	10'
4'	8'
5'	6'
6'	4'

2" OF INSULATION = 2' OF COVER

City of Maple Grove

LAST REVISION
NOVEMBER 2014

INSULATION DETAIL

CITY OF MAPLE GROVE ENGINEERING
& PUBLIC WORKS DEPARTMENTS

STANDARD
PLATE #
WM-12