



Notes

Barrier shall be Strike Products I&I Barrier, Ess Brothers Alignment Barrier or approved equivalent.

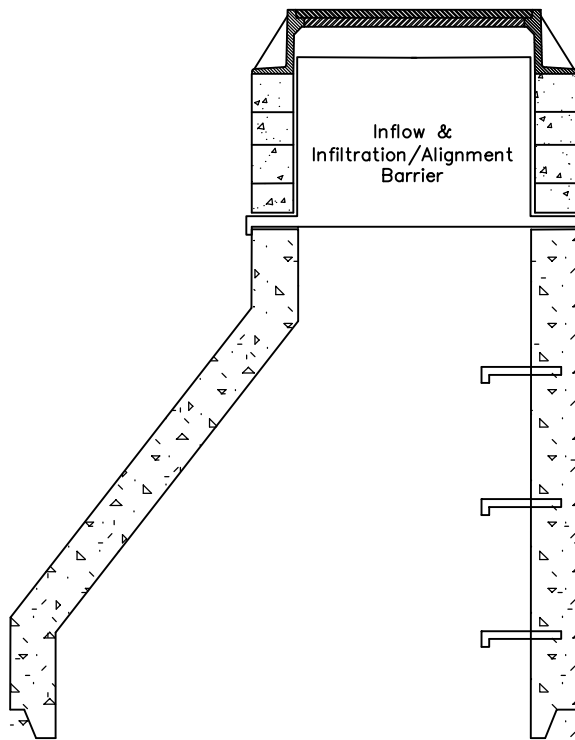

IF USING CONCRETE ADJUSTING RINGS AN ALIGNMENT OR INFLOW & INFILTRATION BARRIER MUST BE INSTALLED. I & I BARRIERS SHALL BE SEALED TO THE CONE USING THE PRODUCT APPROVED GROUT OR SEALANT. CONCRETE ADJUSTMENT RINGS SHALL BE SEALED TO THE CASTING, AND ONE ANOTHER BY USING A PREPACKAGED MOTOR MIX OR MFG SPECIFIED MIX FOR NON-CONCRETE RINGS. TOTAL ADJUSTMENT MINIMUM 4" MAX 14".

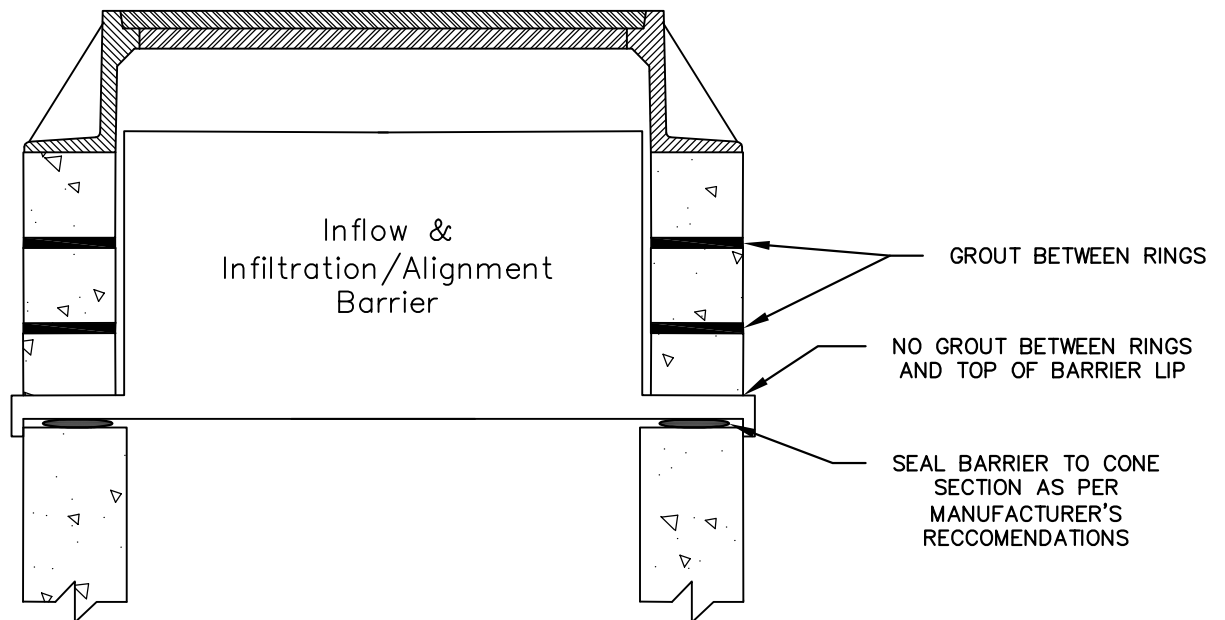

GROUT BETWEEN RINGS

NO GROUT BETWEEN RINGS AND TOP OF BARRIER LIP

SEAL BARRIER TO CONE SECTION AS PER MANUFACTURER'S RECCOMENDATIONS